
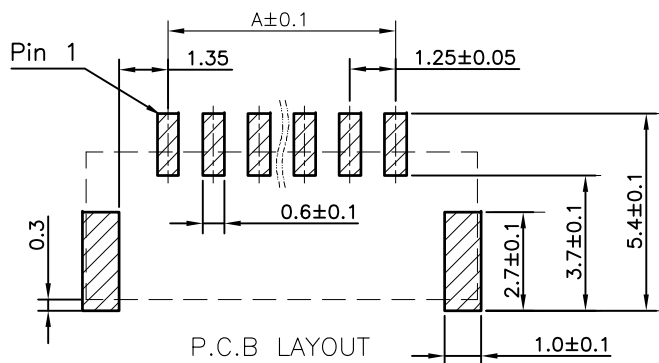
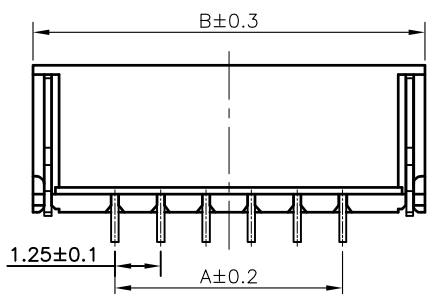



ROHS G103

Pin 1

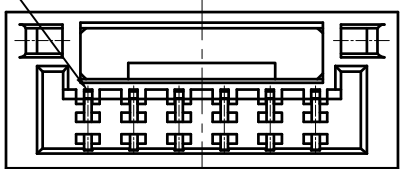

1.ELECTRICAL SPECIFICATIONS:

- 1.1 Rated current and voltage(额定电流):
1.0A 50V AC(r.m.s)
- 1.2 Dielectric Withstanding Voltage(耐电压) :
100V AC for one minute
- 1.3 Contact Resistance(接触电阻) :
30mΩ max
- 1.4 Insulation Resistance(绝缘电阻) :
100MΩ min
- 1.5 Operating Temperature(工作温度) :
-25°C ~ 85°C

2.MATERIAL SPECIFICATION:

- 2.1 Insulator Material(绝缘体材质):
PA9T,UL94V0-0(nature)
- 2.2 Contact Pin Material(接触针材质):
Phosphor Bronze
- 2.3 Solder Tab Material(焊片脚材质):
Phosphor Bronze
- 2.4 Applicable wire:30AWG TO 26AWG

▲表示未生产PIN数

▲ Non-tooled parts

No.of positions DIM list:

CONTACTS	DIMENSIONS	
	A	B
2	1.25	5.75
3	2.50	7.00
4	3.75	8.25
5	5.00	9.50
6	6.25	10.75
7	7.50	12.00
8	8.75	13.25
9	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50
14	16.25	20.75
15	17.50	22.00
▲ 16	18.75	23.25
▲ 17	20.00	24.50
▲ 18	21.25	25.75
▲ 19	22.50	27.00
▲ 20	23.75	28.25

PART NO. LEGEND:

WB1259UR-XXT5

Insulator Material: 5:PA9T

Contact Plating :T:Tin all Over

NO of Contacts: 2 to 20

Welding Method:UR=Side Entry type

Wafer Conn

DRAWING:
Hu yatao

GENERAL TOLERANCE

.X:=±0.30 .X':=±2°
.XX:=±0.25 .XX':=±1°
.XXX:=±0.15 .XXX':=±0.5°


CHECKED:
Tony

UNIT: MM

PROJECTION:

APPROVAL:
Yang jie

SCALE: N/A



SHEET: 1/1



CHIN-BAN
electronics (H.K.) co., Ltd

DESCRIPTION:

1.25mm Pitch Side Entry Type SMT

PART NO: WB1259UR-XXT5




REV: 1.0

CUSTOMER NO:

SIZE: A4

E			
D			
C			
B			
A			
NO.	DATE	DESCRIPTION	APPROVAL

ROHS G103

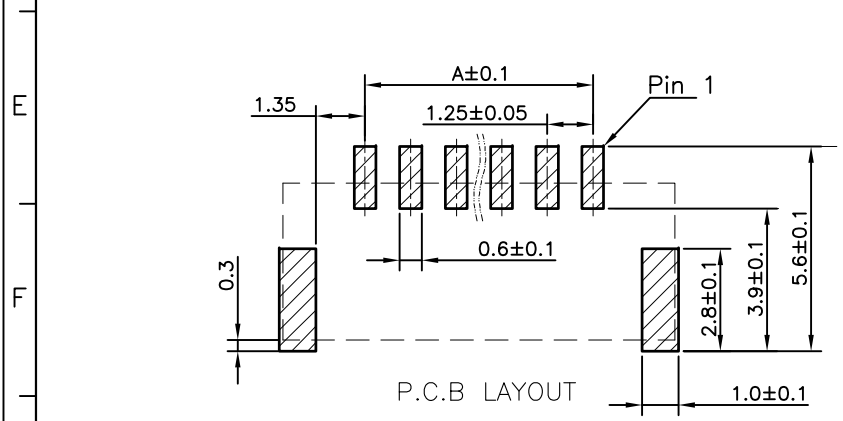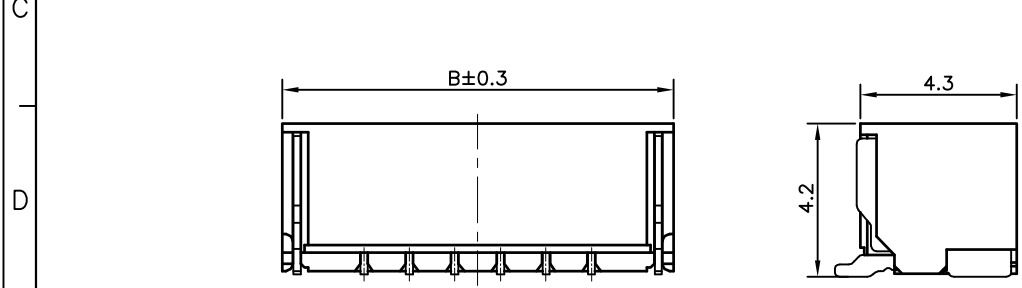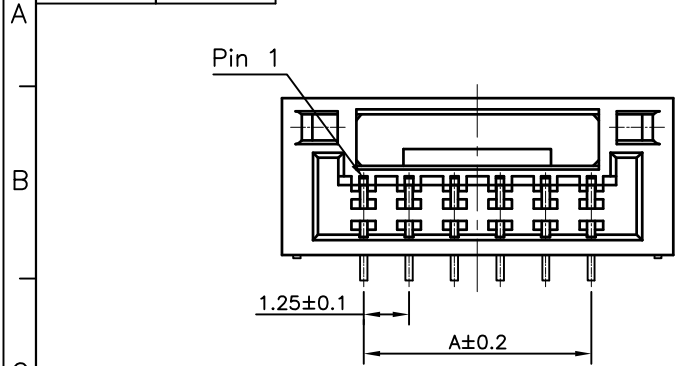

1.ELECTRICAL SPECIFICATIONS:

- 1.1 Rated current and voltage(额定电流):
1.0A 50V AC(r.m.s)
- 1.2 Dielectric Withstanding Voltage(耐电压) :
100V AC for one minute
- 1.3 Contact Resistance(接触电阻) :
30mΩ max
- 1.4 Insulation Resistance(绝缘电阻) :
100MΩ min
- 1.5 Operating Temperature(工作温度) :
-25°C ~ 85°C


2.MATERIAL SPECIFICATION:

- 2.1 Insulator Material(绝缘体材质):
PA9T,UL94V0-0(nature)
- 2.2 Contact Pin Material(接触针材质):
Phosphor Bronze
- 2.3 Solder Tab Material(焊片脚材质):
Phosphor Bronze
- 2.4 Applicable wire:30AWG TO 26AWG

▲表示未生产PIN数
▲ Non-tooled parts
No.of positions DIM list:

CONTACTS	DIMENSIONS	
	A	B
2	1.25	5.75
3	2.50	7.00
4	3.75	8.25
5	5.00	9.50
6	6.25	10.75
7	7.50	12.00
8	8.75	13.25
9	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50
14	16.25	20.75
15	17.50	22.00
▲ 16	18.75	23.25
▲ 17	20.00	24.50
▲ 18	21.25	25.75
▲ 19	22.50	27.00
▲ 20	23.75	28.25

PART NO. LEGEND:
WB1259US-XXT5

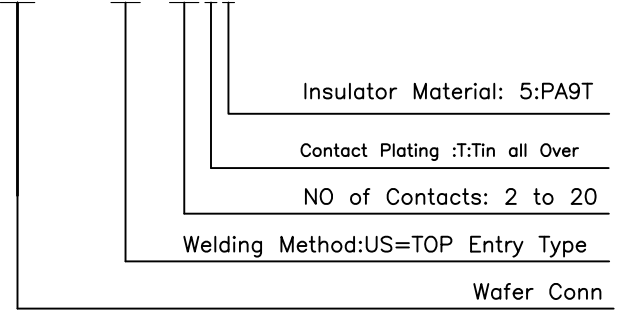

E				DRAWING:
D				Hu yatao
C				CHECKED:
B				Tony
A				APPROVAL:
NO.	DATE	DESCRIPTION	APPROVAL	Yang jie

GENERAL TOLERANCE	
.X:±0.30	.X':±2°
.XX:±0.25	.XX':±1°
.XXX:±0.15	.XXX':±0.5°
UNIT: MM	PROJECTION:
SCALE: N/A	
SHEET: 1/1	







CHIN-BAN

electronics (H.K.) co., ltd

DESCRIPTION: 1.25mm Pitch Top Entry Type SMT	
PART NO: WB1259US-XXT5	REV: 1.0
CUSTOMER NO:	SIZE: A4

ROHS G103

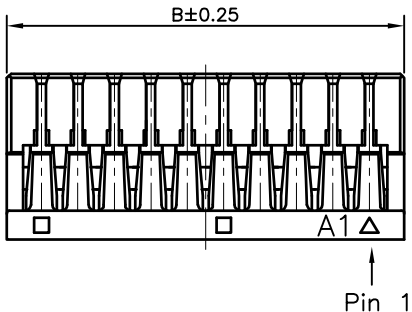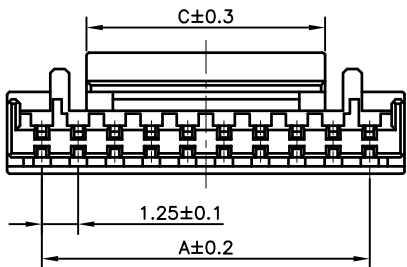

1.ELECTRICAL SPECIFICATIONS:

- 1.1 Rated current and voltage(额定电流):
1.0A 50V AC(r.m.s)
- 1.2 Dielectric Withstanding Voltage(耐电压) :
100V AC for one minute
- 1.3 Contact Resistance(接触电阻) :
30mΩ max
- 1.4 Insulation Resistance(绝缘电阻) :
100MΩ min
- 1.5 Operating Temperature(工作温度) :
-25°C ~ 85°C

2.MATERIAL SPECIFICATION:

- 2.1 Insulator Material(绝缘体材质):
PA66/PBT,UL94V-0(nature)
- 2.2 Applicable wire:30AWG-26AWG

▲表示未生产PIN数
▲ Non-tooled parts
No. of positions DIM list:

CONTACTS	DIMENSIONS		
	A	B	C
2	1.25	3.65	1.90
3	2.50	4.90	3.10
4	3.75	6.15	4.25
5	5.00	7.40	4.25
6	6.25	8.65	6.25
7	7.50	9.90	6.25
8	8.75	11.15	6.25
9	10.00	12.40	6.25
10	11.25	13.65	8.20
11	12.50	14.90	8.20
12	13.75	16.15	8.20
13	15.00	17.40	8.20
14	16.25	18.65	8.20
15	17.50	19.90	8.20
▲ 16	18.75	21.15	8.20
▲ 17	20.00	22.40	8.20
▲ 18	21.25	23.65	8.20
▲ 19	22.50	24.90	8.20
▲ 20	23.75	26.15	8.20

PART NO. LEGEND:
WB1259DSH-XXPX

Insulator Material: 2:PA66
8:PBT
NO of Contacts: 2 to 20
H:Housing
Wafer Conn

DRAWING:
Hu yatao

GENERAL TOLERANCE

.X:=±0.30 .X':=±2'
.XX:=±0.25 .XX':=±1'
.XXX:=±0.15 .XXX':=±0.5'


CHECKED:
Tony

UNIT: MM

PROJECTION:

APPROVAL:
Yang jie

SCALE: N/A



SHEET: 1/1



CHIN-BAN
electronics (H.K.) co., ltd

DESCRIPTION:
1.25mm Pitch Housing Single Row

PART NO: WB1259DSH-XXPX



REV: 1.0

CUSTOMER NO:

SIZE: A4

E			
D			
C			
B			
A			
NO.	DATE	DESCRIPTION	APPROVAL


ROHS G103

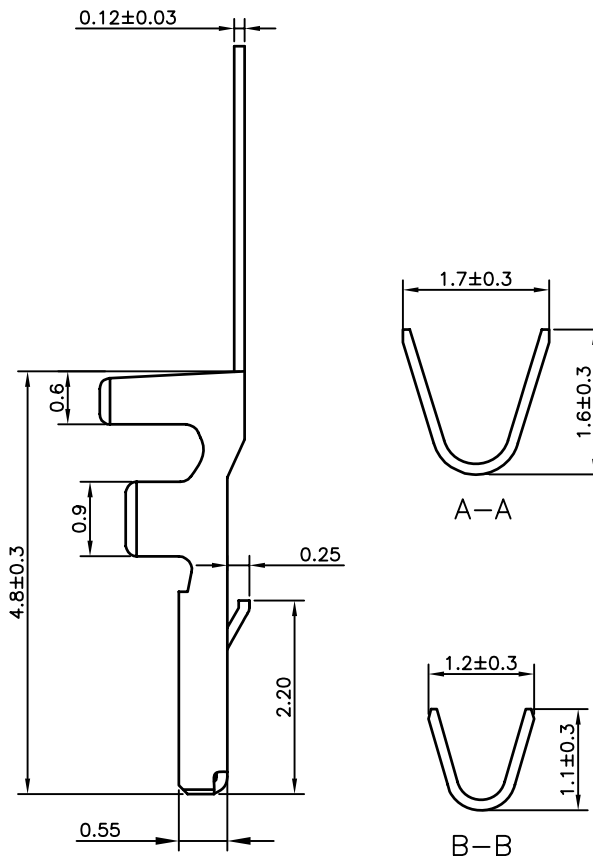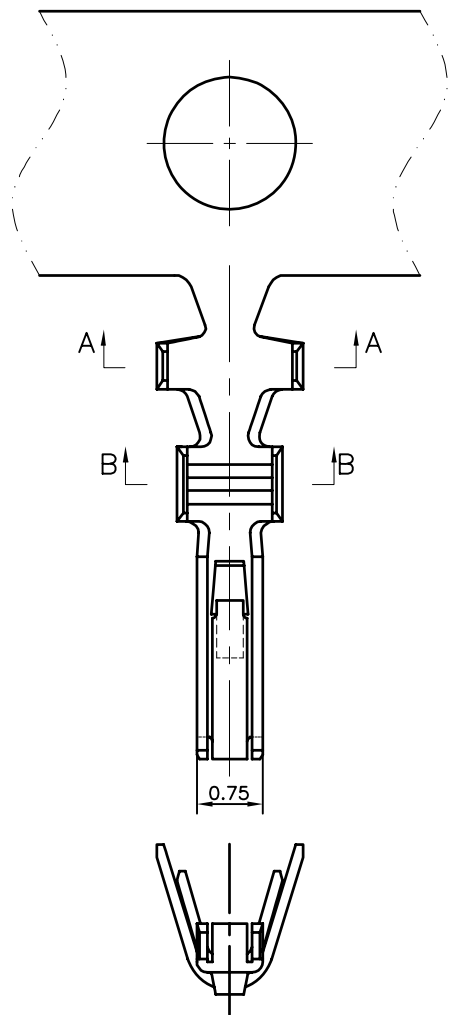

1.ELECTRICAL SPECIFICATIONS:

- 1.1 Rated current and voltage(额定电流):
1.0A 50V AC(r.m.s)
- 1.2 Dielectric Withstanding Voltage(耐电压) :
500V AC for one minute
- 1.3 Contact Resistance(接触电阻) :
20mΩ max
- 1.4 Insulation Resistance(绝缘电阻) :
500MΩ min
- 1.5 Operating Temperature(工作温度) :
-25°C ~ 85°C
- 1.6 Material:
Phosphor Bronze (UL94V-0); Tin
- 1.7 Applicable wire:32AWG TO 26AWG

PART NO. LEGEND:
WB1259DST-T2

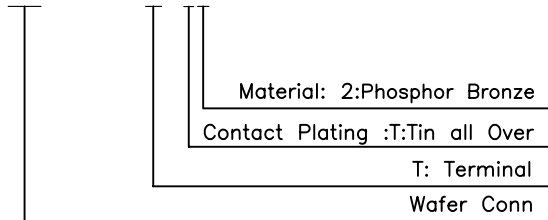

E			
D			
C			
B			
A			
NO.	DATE	DESCRIPTION	APPROVAL

DRAWING: Hu yatao	GENERAL TOLERANCE .X:=±0.30 .X':=±2' .XX:=±0.25 .XX':=±1' .XXX:=±0.15 .XXX':=±0.5'	
CHECKED: Tony	UNIT: MM	PROJECTION:
APPROVAL: Yang jie	SCALE: N/A	
	SHEET: 1/1	

		DESCRIPTION: 1.25mm Pitch Terminal
		PART NO: WB1259DST-T2 REV: 1.0
CUSTOMER NO:		SIZE: A4