


1 2 3 4 5 6 7 8

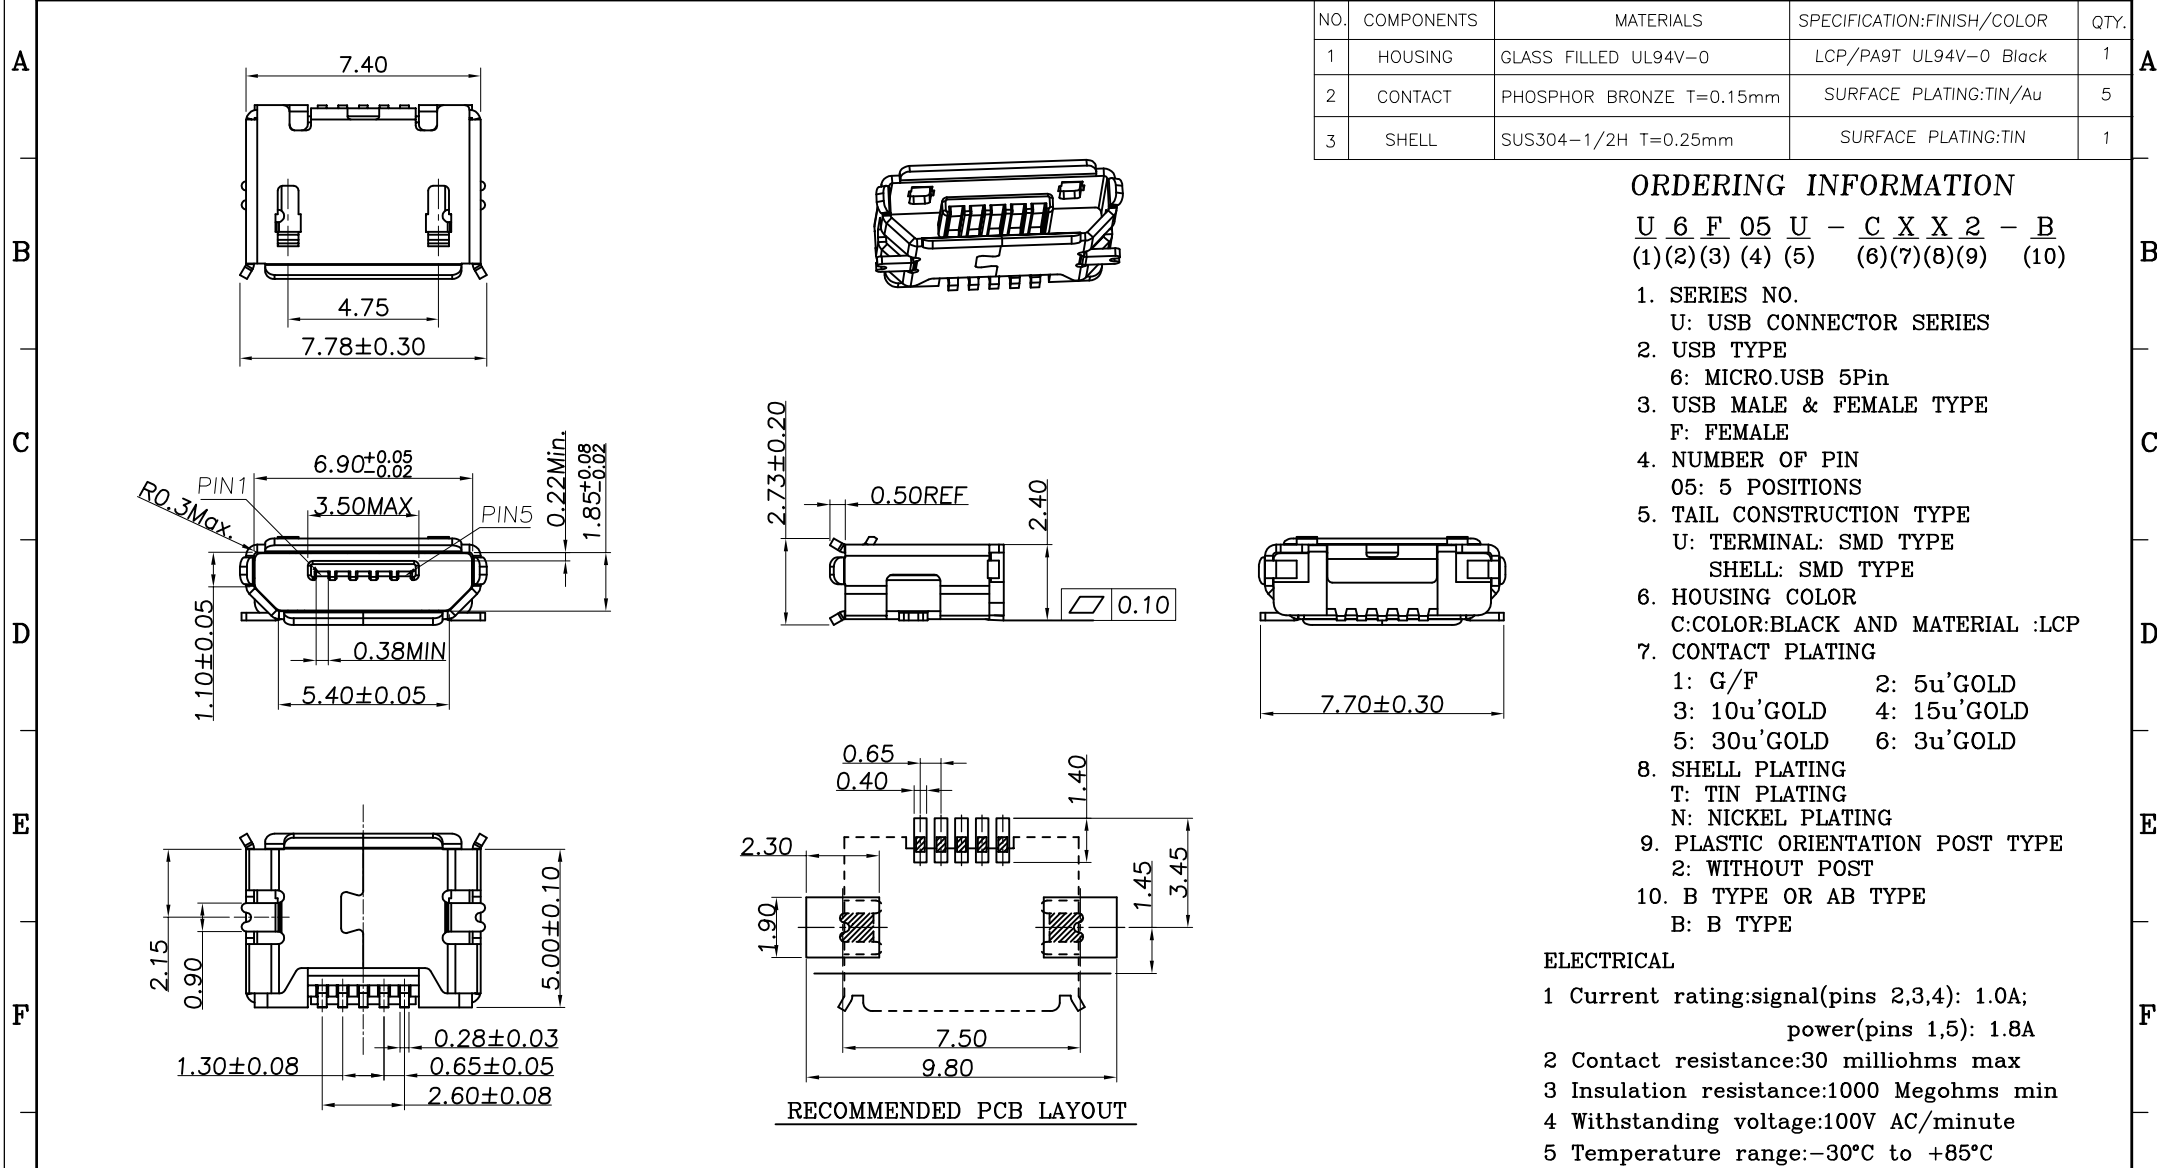



**ORDERING INFORMATION**

U 6 F 05 U - C X X 2 - B  
 (1)(2)(3)(4)(5) (6)(7)(8)(9) (10)

- SERIES NO.  
U: USB CONNECTOR SERIES
- USB TYPE  
6: MICRO.USB 5Pin
- USB MALE & FEMALE TYPE  
F: FEMALE
- NUMBER OF PIN  
05: 5 POSITIONS
- TAIL CONSTRUCTION TYPE  
U: TERMINAL: SMD TYPE  
SHELL: SMD TYPE
- HOUSING COLOR  
C:COLOR:BLACK AND MATERIAL :LCP
- CONTACT PLATING  
1: G/F                    2: 5u'GOLD  
3: 10u'GOLD        4: 15u'GOLD  
5: 30u'GOLD        6: 3u'GOLD
- SHELL PLATING  
T: TIN PLATING  
N: NICKEL PLATING
- PLASTIC ORIENTATION POST TYPE  
2: WITHOUT POST  
B: B TYPE

**ELECTRICAL**

- Current rating:signal(pins 2,3,4): 1.0A;  
power(pins 1,5): 1.8A
- Contact resistance:30 milliohms max
- Insulation resistance:1000 Megohms min
- Withstanding voltage:100V AC/minute
- Temperature range:-30°C to +85°C

5.0				DRAWING:	GENERAL TOLERANCE		 <p><b>CHIN-BAN</b> electronics (H.K) co., ltd</p>
4.0				Bains	.X:±0.30    .X°:±2°	DESCRIPTION: MICRO USB 5PIN B TYPE	
3.0				CHECKED:	.XX:±0.20    .XX°:±1°		
2.0				Tian Hai	.XXX:±0.10    .XXX°:±0.5°	PART NO:            U6F05U-CXX2-B            REV: 4.0 DRAWING NO:        UK0172                    SIZE: A4	
1.0				APPROVAL:	UNIT: MM	PROJECTION:	
NO.	DATE	DESCRIPTION	APPROVAL	Tian Hai	SCALE: 1/1		
1					SHEET: 1/1		

1 2 3 4 5 6 7 8