
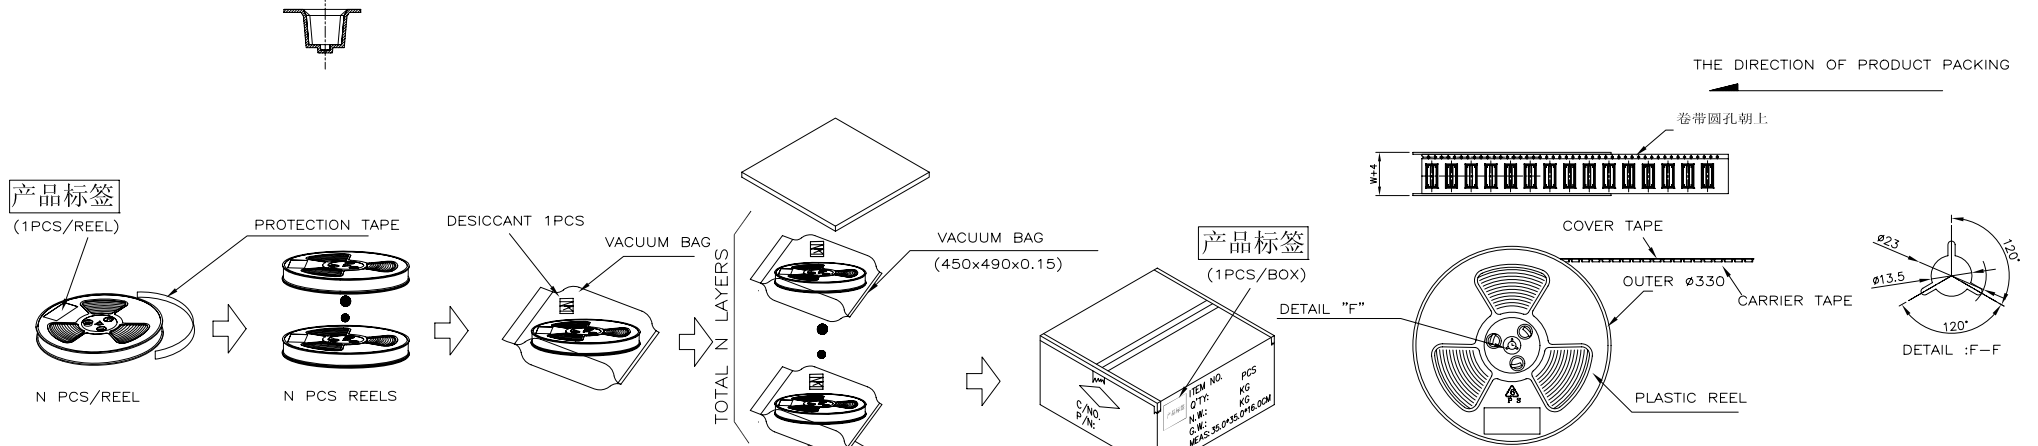



ROHS

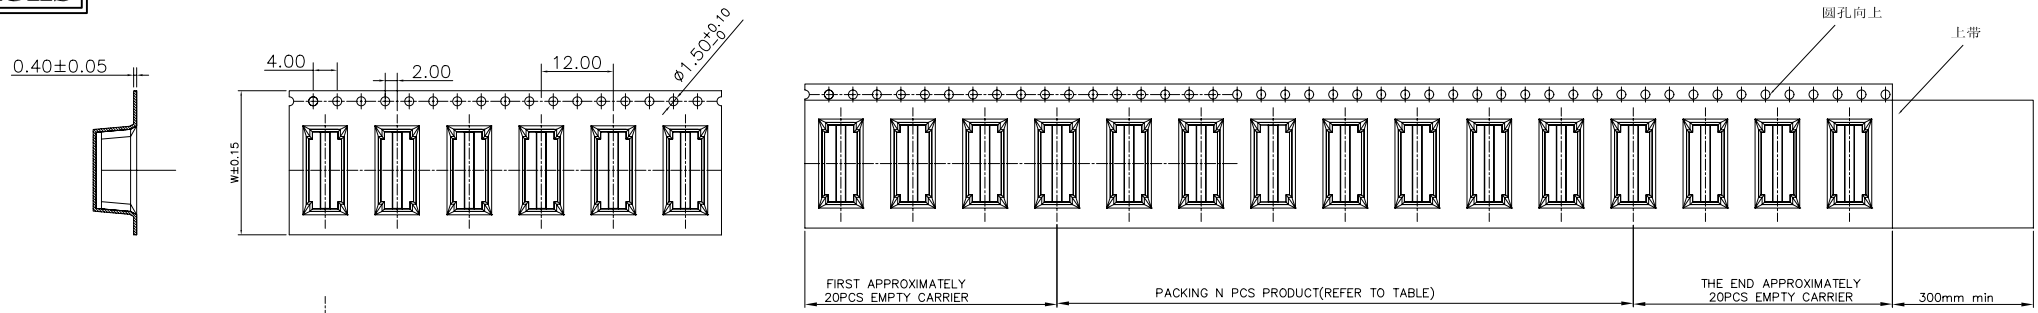


PACKING INFORMATION:

PART NAME	W	PCS/REEL	REEL/CARTON	TOTAL	CARTON
B1F10U-C1R-R	16.0	800 PCS	6 PCS	4.8K PCS	350*350*160mm
B1F16U-C1R-R		800 PCS	5 PCS	4.0K PCS	
B1F20U-C1R-R		800 PCS	5 PCS	4.0K PCS	
B1F24U-C1R-R		800 PCS	5 PCS	4.0K PCS	
B1F26U-C1R-R	24.0	800 PCS	5 PCS	4.0K PCS	
B1F30U-C1R-R		1300 PCS	5 PCS	6.5K PCS	
B1F32U-C1R-R		900 PCS	5 PCS	4.5K PCS	
B1F34U-C1R-R		1300 PCS	5 PCS	6.5K PCS	
B1F36U-C1R-R		800 PCS	5 PCS	4.0K PCS	

NOTE:
 1. PEELING OFF FORCE OF TOP TAPE: 40~100g
 (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
 THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
 PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.

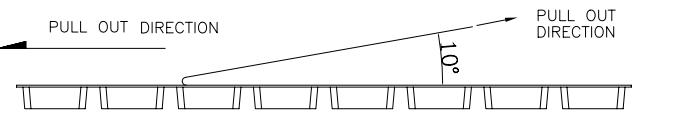


2. MATERIAL:
 CARRIER TAPE: POLYSTYREN(PS)
 TOP TAPE: PE
 REEL TAPE: POLYSTYREN(PS)

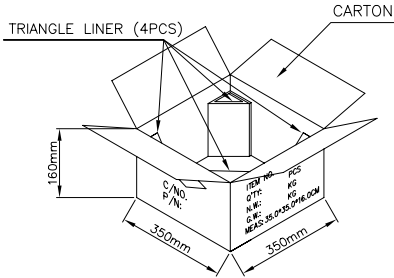

G	5.0				DRAWING:		
	4.0				Henry		
	3.0				CHECKED:		
	2.0						
H	1.0	2016.06.26	NEW	Tian hai	APPROVAL:		
	NO.	DATE	DESCRIPTION	APPROVAL			

DRAWING:		GENERAL TOLERANCE	
Henry		.X: ±0.50	.X*: ±2°
CHECKED:		.XX: ±0.30	.XX*: ±1°
		.XXX: ±0.20	.XXX*: ±0.5°
UNIT:	MM	PROJECTION:	
SCALE:	1/1		
SHEET:	1/1		



CHIN-BAN

electronics (H.K) co., ltd

DESCRIPTION:	
0.5mm Board to Board Female-PACKING	
PART NO:	F-B1FXXU-C1R-R
DRAWING NO:	UT0056
REV:	1.0
SIZE:	A4