
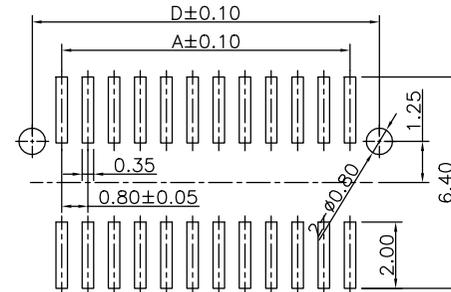
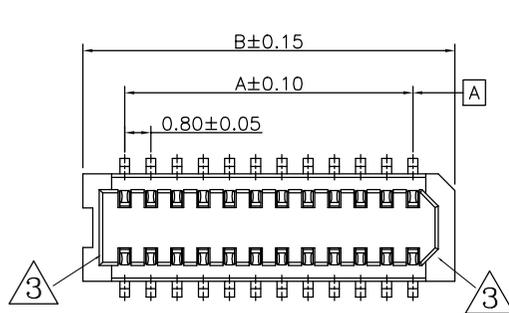


ROHS

NO.	COMPONENTS	MATERIALS	SPECIFICATION:FINISH/COLOR	QTY.
1	HOUSING	PA9T/PA46(UL94V-0)	NATURAL	1
2	CONTACT	PHOSPHOR BRONZE	THE SURFACE: AU	N







NOTE:
 1.ALL MATERIAL MUST BE COMPLY WITH ROHS.
 2.PART NO. LEGEND:

B2MXXU-XXSX-R

- 1.POST
- 2.WITHOUT POST
- 1: G/F, GOLD OVER ALL
- 2: 15u' GOLD OVER ALL
- 3: 30u' GOLD OVER ALL
- C:PA9T NATURAL
- D:PA46 NATURAL
- U: SMD TYPE
- XX: XX POSITIONS

CIRCUITS	DIM A	DIM B	DIM C	DIM D
2x5	3.20	5.75	4.75	5.00
2x6	4.00	6.55	5.55	5.80
2x7	4.80	7.35	6.35	6.60
2x8	5.60	8.15	7.15	7.40
2x9	6.40	8.95	7.95	8.20
2x10	7.20	9.75	8.75	9.00
2x11	8.00	10.55	9.55	9.80
2x12	8.80	11.35	10.35	10.60
2x13	9.60	12.15	11.15	11.40
2x14	10.40	12.95	11.95	12.20
2x15	11.20	13.75	12.75	13.00
2x16	12.00	14.55	13.55	13.80
2x17	12.80	15.35	14.35	14.60
2x18	13.60	16.15	15.15	15.40
2x19	14.40	16.95	15.95	16.20
2x20	15.20	17.75	16.75	17.00
2x21	16.00	18.55	17.55	17.80
2x22	16.80	19.35	18.35	18.60
2x23	17.60	20.15	19.15	19.40
2x24	18.40	20.95	19.95	20.20
2x25	19.20	21.75	20.75	21.00

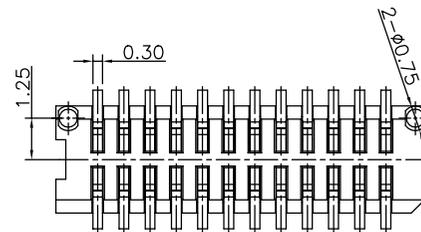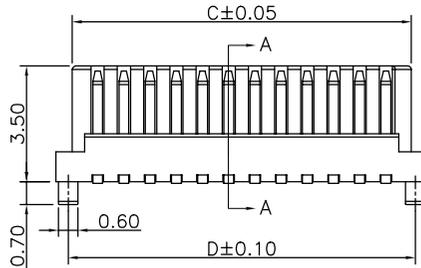

ELECTRICAL PERFORMANCE:

1. RATED VOLTAGE(MAX.):50V AC/DC
2. RATED CURRENT(MAX.):0.5A AC/DC
3. DIELECTRIC STRENGTH:250V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
4. INSULATION RESISTANCE:500 MEGOHMS MIN. 250V DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
5. CONTACT RESISTANCE:40 MILLIOHM MAX.
6. OPERATING TEMPERATURE:-25°C to +85°C

5.0				DRAWING:
4.0	2016.7.8	修改图框	Tian hai	ZLW
3.0	2013.6.6	1.右侧倒角C0.3变更为C0.5, 左侧为直角 2.改善端子插入铲胶, 胶芯减胶	Henry	CHECKED:
2.0	2013.5.10	增加倒角C0.3,改善插入过紧	Toms	Tian hai
1.0	2013.3.10	NEW	Toms	APPROVAL:
NO.	DATE	DESCRIPTION	APPROVAL	Cykin

GENERAL TOLERANCE	
.X:=±0.30	.X':=±2°
.XX:=±0.20	.XX':=±1°
.XXX:=±0.10	.XXX':=±0.5°
UNIT: MM	PROJECTION:
SCALE: N/A	
SHEET: 1/1	



CHIN-BAN
 electronics (H.K) co., ltd

DESCRIPTION: 0.8mm Board to Board Plug	
PART NO: B2MXXU-XXSX-R	REV: 4.0
DRAWING NO: UK0282	SIZE: A4