


ROHS+REACH+CP65+19P+PAHS 二类

REV.	DATE	DESCRIPTION	APPROVAL
X0	2017.05.23	NEW PRODUCT	wangyuan
X1	2017.05.31	UPDATE DRAWING	wangyuan
X2	2017.06.06	CHANGE THE WIRE	wangyuan
X3	2017.07.26	ADD THE HOUSING WIDTH	wangyuan
X4	2017.08.01	CHANGE THE WIDTH TOLERANCE OF THE HOUSING	wangyuan

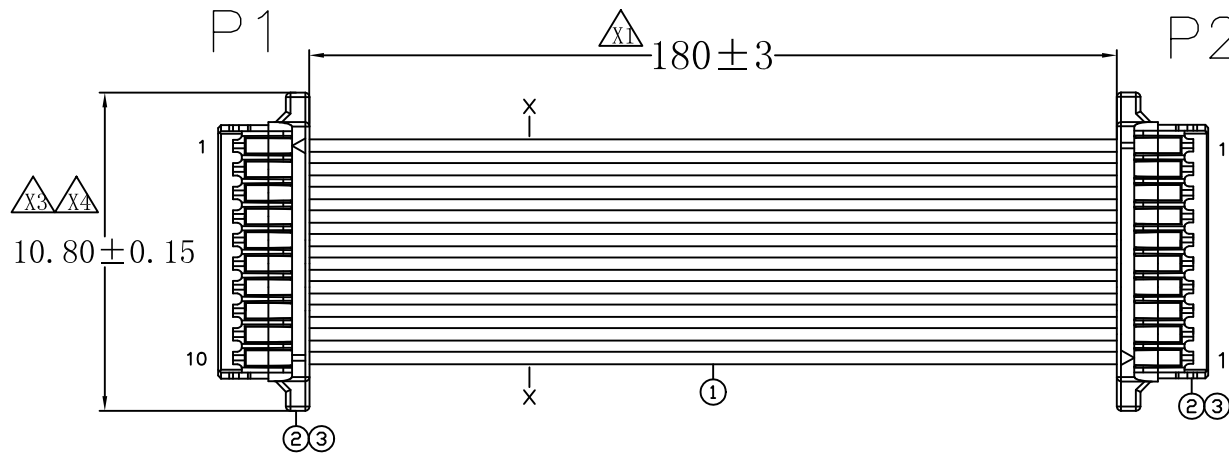

WIRING TABLE

P1		P2
1	RED	10
2	BLACK	9
3	WHITE	8
4	GRAY	7
5	ORANGE	6
6	YELLOW	5
7	GREEN	4
8	BLUE	3
9	PURPLE	2
10	BROWN	1

NOTES:

- 100% CONTINUNY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED
- INSULATION RESISTANCE:20M OHMS MIN
- CONDUCTOR RESISTANCE:1Ω MAX
- COMPLY WITH IPC/WHMA-A-620 CLASS 2 GENERAL WORKMANSHIP CRITERIA

					DRAWING: <i>wangyuan</i> 2017.05.23	TOLERANCE .X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2°	
③	HOUSING	Single row socket pitch:0.8mm*10Pin LCP white	2PCS		CHECKED: <i>Ricky</i> 2017.05.23		DESCRIPTION: PITCH:0.8mm*10P TO PITCH:0.8mm*10P
②	TERMINAL	Pitch:0.8mm crimping terminal phosphor bronze tin-plated 28-32AWG	20PCS		APPROVAL: <i>Cykin</i> 2017.05.23	UNIT: mm	CUSTOMER: REV: X4
①	WIRE	UL10937 28AWG(7/0.127TC)105°C 30V insulation:XLPE OD:0.55~0.58mm red/black/white/gray/orange/yellow/green/blue/purple/brown	10PCS			SCALE:N/A	CUSTOMER P/N: DEF. UK
ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N		SHEET:1/1	DRAWING NO: A-HSHS-06HA-F649 SIZE:A4