


**ROHS+REACH**

NO.	DATE	DESCRIPTION	APPROVAL
X0	2017.06.26	NEW PRODUCT	LI HUI

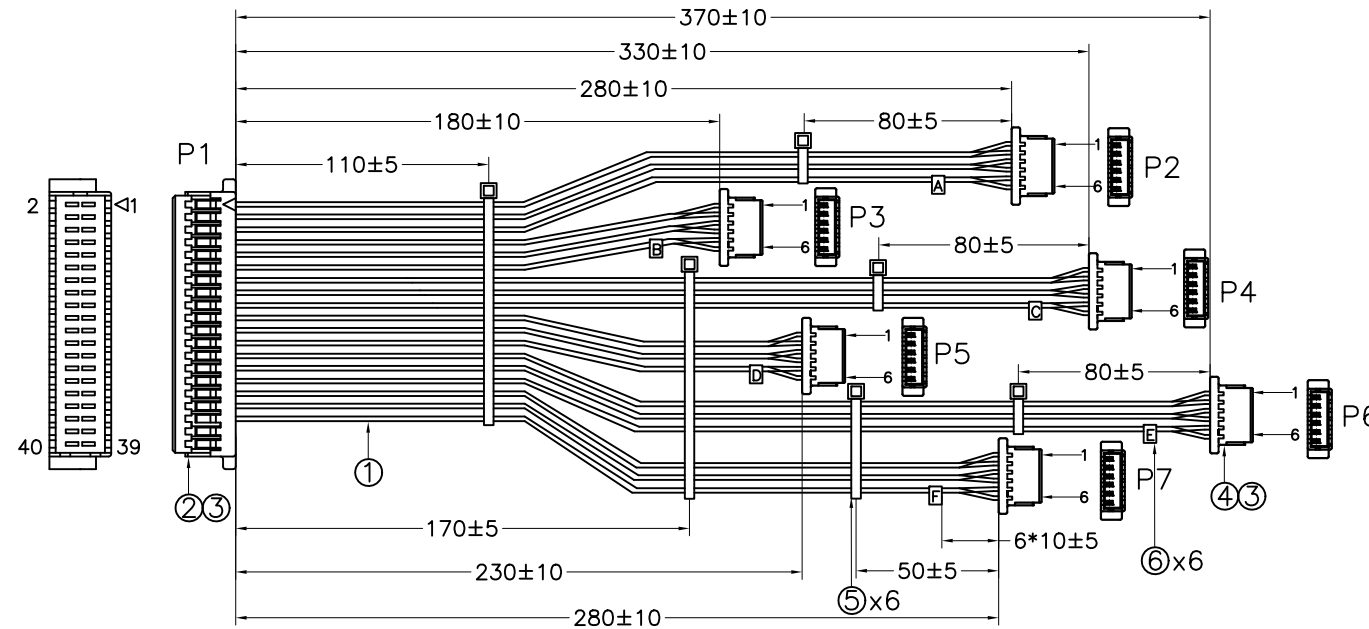

WIRE DEFINITION

P1	COLOR	P2	P3	P4	P5	P6	P7
1	RED	1					
2	WHITE	2					
3	GREEN	3					
4	BLAKC	4					
5	YELLOW	5					
6	BLUE	6					
7	RED		1				
8	WHITE		2				
9	GREEN		3				
10	BLAKC		4				
11	YELLOW		5				
12	BLUE		6				
13	RED			1			
14	WHITE			2			
15	GREEN			3			
16	BLAKC			4			
17	YELLOW			5			
18	BLUE			6			
19	RED				1		
20	WHITE				2		
21	GREEN				3		
22	BLAKC				4		
23	YELLOW				5		
24	BLUE				6		
25	RED					1	
26	WHITE					2	
27	GREEN					3	
28	BLAKC					4	
29	YELLOW					5	
30	BLUE					6	
31	RED						1
32	WHITE						2
33	GREEN						3
34	BLAKC						4
35	YELLOW						5
36	BLUE						6
37	NC						
38	NC						
39	NC						
40	NC						

NOTES:

- 1.100% CONTINUY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED
- 2.INSULATION RESISTANCE:20M OHMS MIN
- 3.CONDUCTOR RESISTANCE:1Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
⑥	LABEL	LABEL STYLE:12*30mm PRINTING CONTENT AS SHOWN ABOVE	6PCS	
⑤	TIES	CABLE TIES W:2mm*L=100MM WHITE NYLON BUCKLES	6PCS	
④	HOUSING	SINGLE ROW SOCKET PITCH:1.0mm-6PIN WHITE	6PCS	
③	TERMINAL	CRIMP TERMINAL MALTERIALS: PHOSPHOR BRONZE HALF A GOLD PLATED	72PCS	
②	HOUSING	DOUBLE ROW SERIES PITCH:1.0mm*2*20PIN WHITE	1PCS	
①	WIRE	UL1571 30AWG 80°C 30V INSULATION:PVC OD:0.8mm COLOR AS SHOWN ABOVE	36PCS	

DRAWING:  
*li hui*  
 2017.06.26

CHECKED:  
*Ricky*  
 2017.06.26

APPROVAL:  
*Cykin*  
 2017.06.26

TOLERANCE  
 .X:=±0.50  
 .XX:=±0.30  
 .XXX:=±0.10  
 .X':=±2°



**CHIN-BAN**  
 electronics (H.K) co., ltd

DESCRIPTION:  
 PITCH:1.0-2\*20P TO PITCH:1.0-6P

UNIT: mm	CUSTOMER:	REV: X0
SCALE:N/A	CUSTOMER P/N:	DEF. UK
SHEET:1/1	DRAWING NO: A-HSHS-08HN-N149	SIZE: A4