




ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2016.12.10	NEW PRODUCT	Alu-zhang
X1	2017.05.11	CHANGE THE WIRE LENGTH	Alu-zhang
X2	2017.05.26	ADD THE COIL	wangyuan
X3	2017.08.31	CHANGE THE COIL COLOR	wangyuan

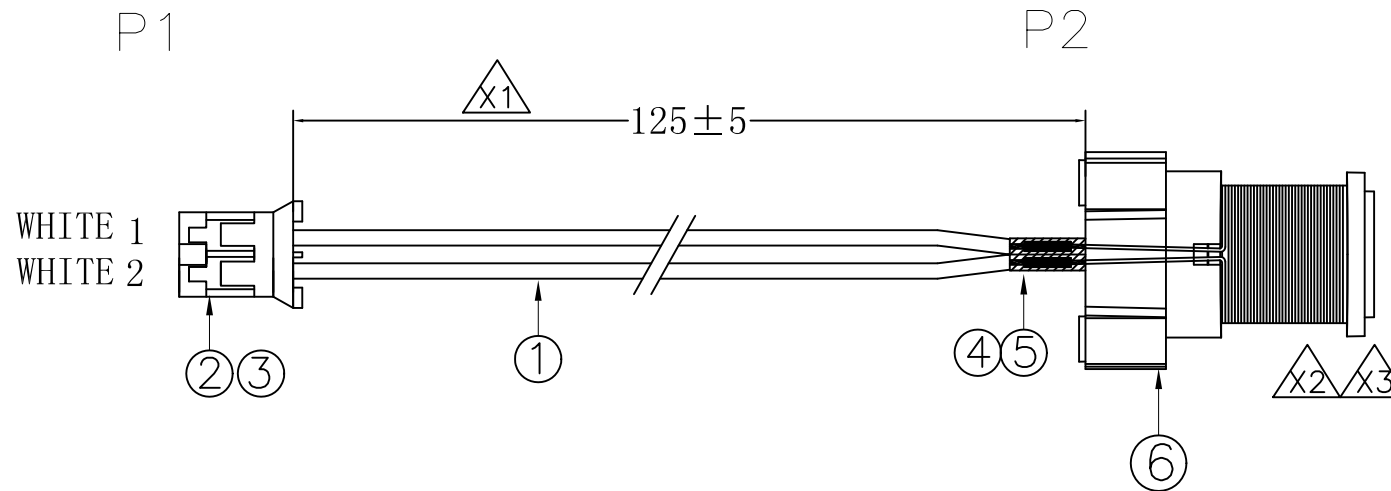

NOTES:
 1.100% CONTINUITY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED
 2.INSULATION RESISTANCE:DC200V, 20M OHMS MIN
 3.CONDUCTOR RESISTANCE:1Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
⑥	COIL	COIL, $\triangle X3$	1PCS	
⑤	TUBE	SHRINK TUBING: $\phi 2.0 \times 12 \text{mm}$ BLACK	1PCS	
④	TUBE	SHRINK TUBING: $\phi 1.0 \times 8 \text{mm}$ BLACK	2PCS	
③	TERMINAL	CRIMPING TERMINAL PHOSPHOR BRONZE TIN-PLATED 24-30AWG	2PCS	
②	HOUSING	SINGLE ROW SOCKET PITCH:2.0mm*2PIN WHITE	1PCS	
①	WIRE	UL1061 26AWG 80°C 300V INSULATION:PVC WHITE OD:1.0mm	2PCS	

DRAWING: Alu-zhang 2016.12.10	TOLERANCE .X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2'	 CHIN-BAN electronics (H.K) co., Ltd	
	 UNIT: mm SCALE:N/A SHEET:1/1		
CHECKED: Ricky 2016.12.10		REV: X3	
APPROVAL: Bykin 2016.12.10		DEF. UK	
		SIZE: A4	