



**ROHS**

REV.	DATE	DESCRIPTION	APPROVAL
X0	2016.09.20	NEW PRODUCT	Ricky
X1	2016.11.08	UPDATE DRAWING	Ricky
X2	2017.03.20	CHANGE THE LENGTH FROM 705 TO 740	Ricky
	2017.04.12	TO HSG BY 10 to 8.6	Ricky

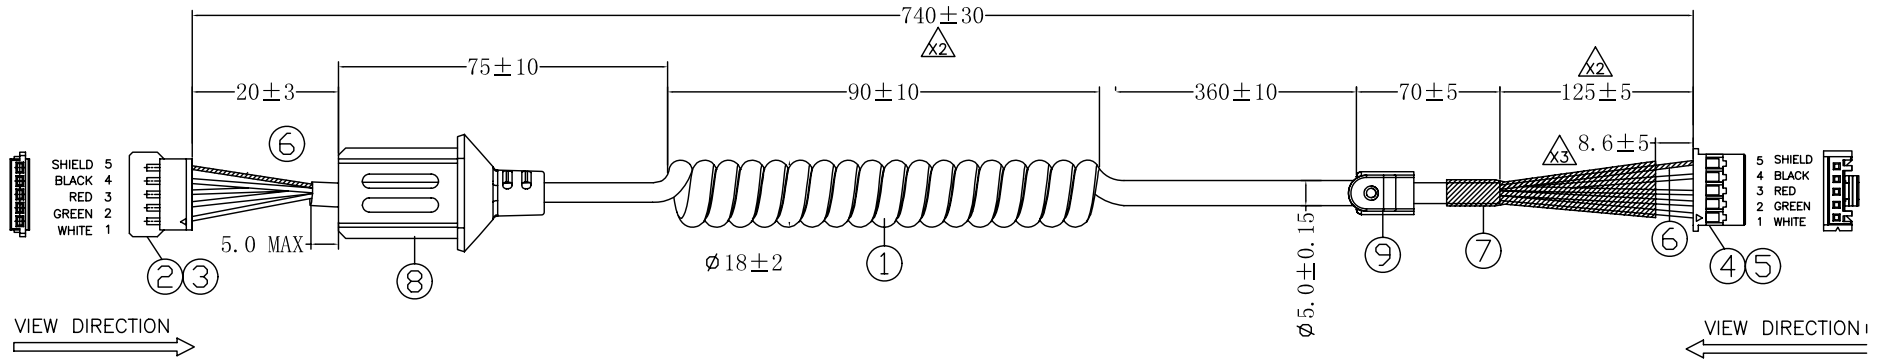

NOTES:

- 1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED,
- 2.INSULATION RESISTANCE:DC200V/MINUTE, 20MΩ MIN.
- 3.DIELECTRIC STRENGTH:250VAC/MINUTE, LEAKAGE CURRENT:1.0mA
- 4.CONDUCTOR RESISTANCE:DC20mV,10mA, 1Ω MAX.

⑨	MOLD	TPU 85A, COLOR: RAL7004 (C6990-C01015)	$\Delta_{X1}$	A/R	
⑧	MOLD		$\Delta_{X1} \Delta_{X2}$	A/R	
⑦	TUBE	SHRINK TUBE:Ø5.0MM 125°C 600V BLACK L=145MM		1PCS	
⑥	TUBE	SHRINK TUBE:Ø1.0MM 125°C 600V BLACK		2PCS	
⑤	TERMINAL	CRIMPING TERMINAL PHOSPHOR BRONZE TIN-PLATED 22-28AWG		5PCS	
④	HOUSING	SINGLE ROW PLUG PITCH:2.0mm*5PIN WHITE		1PCS	
③	TERMINAL	CRIMPING TERMINAL PHOSPHOR BRONZE TIN-PLATED 24-28AWG		5PCS	
②	HOUSING	SINGLE ROW PLUG PITCH:2.0mm*5PIN WHITE		1PCS	
①	CABLE	24AWG*4C(RED,BLACK,GREEN,WHITE)+AEB OD:5.0mm JACKET COLOR: RAL7004 TPU	$\Delta_{X1} \Delta_{X2}$	1PCS	
ITEM	TITLE	SPECIFICATION		Q'TY	CHIN-BAN P/N

DRAWING:	TOLERANCE		
<i>Mark</i> 2016.09.26	.X:=±0.50 .XX:=±0.30 .XXX:=±0.10 .X':=±2°		
CHECKED:	DESCRIPTION:	Load Cell Cable Loom	
<i>Ricky</i> 2016.09.26	UNIT: mm	CUSTOMER:	REV: X3
APPROVAL:	SCALE:N/A	CUSTOMER P/N:6990-C01053	DEF. UK
<i>Cykin</i> 2016.09.26	SHEET:1/1	DRAWING NO: A-HSHS-5005-F417	SIZE: A4