ROHS

NO.	DATE	DESCRIPTION	APPROVAL
1.0	17.05.03	NEW	Huyatao

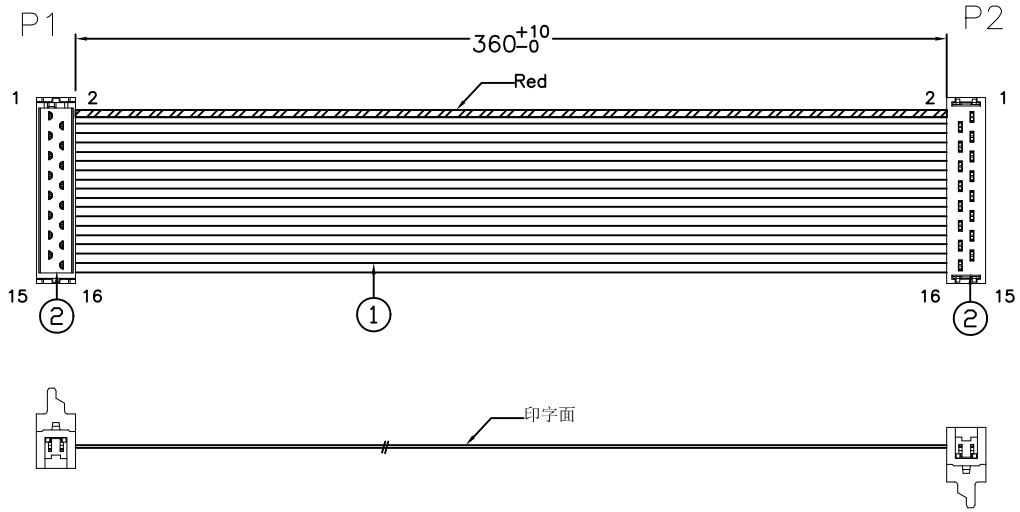

WIRE DEFINITION

P1	COLORC	P2
1	RED	1
2	GRAY	2
3	GRAY	3
4	GRAY	4
5	GRAY	5
6	GRAY	6
7	GRAY	7
8	GRAY	8
9	GRAY	9
10	GRAY	10
11	GRAY	11
12	GRAY	12
13	GRAY	13
14	GRAY	14
15	GRAY	15
16	GRAY	16

NOTES:
1. 100% CONTINUNY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED
2. INSULATION RESISTANCE:20M OHMS MIN
3. CONDUCTOR RESISTANCE:3Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
②	IDC	Micro-MaTch-2*8P PITCH2.54mm	2PCS	
①	WIRE	UL2651 28AWG(7/0.12TS)*16P pitch1.27mm INSULATION:PVC GREY ROWS WITH RED TRIM	1PCS	

DRAWING: ZMY

CHECKED: Hu yatao

APPROVAL:

TOLERANCE
.X:=±0.50
.XX:=±0.30
.XXX:=±0.10
.X°:=±2°

UNIT: mm

SCALE:N/A

SHEET:1/1

CHIN-BAN
electronics (H.K) co., ltd

DESCRIPTION: Micro-MaTch 16P WIRE

CUSTOMER:

CUSTOMER P/N:

DRAWING NO:4401-16SR-L360-S86

REV: 1.0

DEF. UK

SIZE: A4